


[Home](#) [Forum](#) [Garage](#) [Chat](#)


Power Companies HATE This



Energy companies are scared that people will learn how to produce Free Electricity f

Power Companies HATE This!

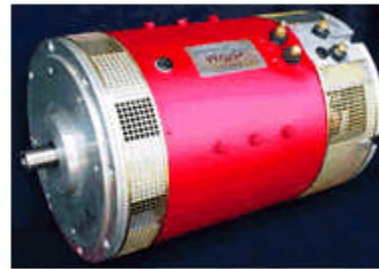

Energy companies are scared that people will learn how to produce Free Electricity fo their homes using this unique device.

[Home](#)

door pin and bushing repair

Submitted by rliith on Tue, 2006-06-06 02:25.

Tags: [Exterior](#) [General Maintenance](#)

JUN
06

Well, since no one has done a how-to on this subject, I figured I would since we always see this question...The following pictures were

taken while we we're working on Grappler's 95 2 door Blazer (www.vettel.org/andy). We completed both his doors and my front passenger side door.

(www.pghconsulting.net/teal). All told we averaged 15-20 minutes per door for this repair. The bushings on all 3 doors were cracked and at the beggining of being egged.

Should your hinge pin holes be egged (taking on an egged shape) You have the option of either replacing the

wheel & tires

search

user login

Username: *


Password:

☐ Remember me

- [Create new account](#)
- [Request new password](#)

forum discussions

- [Random Picture Thread!](#)
- [Serious Credit!](#)
- [Tiki Truck.. Rebuild](#)

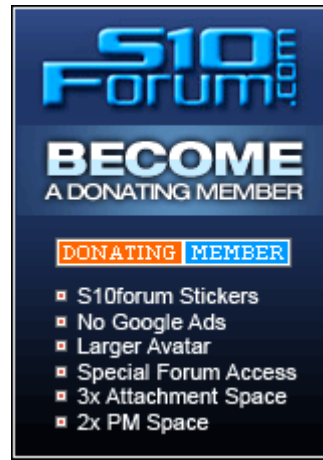

91-Sonoma

- Anger issues
- Post random stuff from cellphone cameras: Part ...
- Road Trip
- Project Dirty Dime
- Is1 blazer
- Photography
- New s10 job, ambitious custom job :)

hinge
 (a
 night
 or
 filling
 in
 the
 hole:
 with
 weld
 grind
 down
 then
 redri
 (abo
 20
 mins
 worth
 of
 work
 Fort
 for
 us
 we
 didn'
 have
 to
 do
 eithe
 But

technical specs

- Chassis
- Drivetrain
- Electrical
- Engine
- ECU
- RPO Codes
- S-Series History

news

- Press Releases
- GM Industry News
- S10F Site News
- Event Coverage

how to's

- Audio
- Chassis
- Drivetrain
- Exterior
- Interior
- Suspension (Adjustable)
- Suspension (Static)
- General Maintenance

we
will
both
need
to
keep
an
eye
on
these
hinges
for
a
few
years

Tools
need

BF
Ham
Punc
(imp
Masl
tape
Lithi
grea
Door
Sprin
tool
(or
impr
thou
the
tool
make
life
a
happ
place
Anot
set

of
hand
(invit
frien
Buck
(or
simil
Larg
flat
head
scre
or
a
cold-
Hing
pins
and
bush
(Mak
sure
you
get
the
right
ones
1st
gen
and
secc
gen
pins
and
bush
are
quite
diffe
Soft
bristl
brusl

So
we

start
by
tap in
up
the
inside
and
outside
of
the
door
to
prevent
damage
to
the
paint

Next
we
remove
the
door
spring
with
our
hand
dandy
door
tool..

Now
the
door
needs
to
be
supported
Here
where
the
buck

cam
in
hand
as
well
as
the
extra
set
of
hand
Thes
door
are
heav
and
awkv
so
havir
a
budc
(in
my
case
grap
balar
the
door
make
life
a
lot
easier
Optic
if
you
can
build
your
a
prop

door

hang

a

budc

won't

be

neec

for

anyth

exce

pass

you

a

tool

or

two..

Now

for

the

fun

part.

peop

think

it's

simp

to

knoc

pins

out.

It's

not.

First

you

neec

to

make

sure

you

don't

whac

the

wind
secc
they
can
be
in
there
prett
tight.
Grap
were
prett
mucl
ruste
to
hell
and
it
really
took
a
lot
of
pers
you
can
see
me
with
2
long
1/4"
ratch
extei
I
find
this
bette
than
a
punc

beca
the
hole
in
the
base
gets
a
nice
lock
on
the
top
of
the
pin.
This
will
prev
it
from
shifti
as
you'r
whac
it
and
you
won't
put
any
dent
into
your
body
Also
you
may
have
a
little

ring
on
top
of
the
old
pins.
Don'
worn
about
it,
they
can't
be
reus
As
you
punc
the
old
pin
out,
it
will
fall
off.

Next
sepe
the
door
from
the
body
this
slow
to
prev
paint
dam
to
your

truck

Here

we

see

Grac

after

he

sepe

the

door

Next

we

take

our

large

flath

scre

and

put

it

again

the

bottc

of

the

old

bush

and

whac

it

with

the

ham

Dep

how

tight

your

old

bush

are,

they

can
eithe
immu
fall
out,
or
you
will
have
to
chip
away
at
them
until
they
fall
out.
If
they
fall
out
withc
anyfo
take
a
gooo
look
at
the
bush
hole
to
chec
for
eggli
Once
the
bush
are
knoc

out,
you
will
be
left
with
this..
is
a
good
time
to
take
a
brush
and
maybe
soap
and
water
and
clear
any
debris
in
the
hole:
and
surround
dirt
off
the
door
jam
and
hinge

Now
for
the
installation
of

the
new
bush
Here
we
see
one
of
Grap
old
Pins
and
the
new
GM
OEM
bush
and
pins
that
we
are
going
to
insta
As
you
can
see
the
old
pin
which
was
facto
was
prett
poo

Note
Thes
bush

are
diffe
sizes
The
top
bush
(or
bottc
depe
whic
side
you'r
work
on)
Is
large
than
the
bottc
This
is
to
acco
the
expa
top
part
of
the
pin.
DO
NOT
MIX
THE
UP!

If
you
want
you
can
now

tap
in
your
new
bush
with
a
ham
The
prob
with
this
is
that
you
run
the
risk
of
dam
the
bush
espe
if
it's
an
OEM
bush
and
not
a
splin
after
So
what
woul
woul
any
self
resp
S/T

tinke

like

myste

do?

Impr

I

crea

a

nice

pres

out

of

som

stuff

in

my

gara

The

pres

cons

of

a

2-1/2

bolt

that

woul

fit

throu

both

bush

a

wast

a

sock

and

a

13m

nut..

Here

you

see
it
seat
read
to
cranl
down
This
made
life
a
lot
easier
and
take
about
10
secc
to
do.
Simp
tight
it
down
until
the
top
of
the
bush
mee
the
hinge

Done

Whe
you
get
all
4
bush

done
simp
load
the
door
back
onto
the
hinge
and
slide
the
pins
in.
Once
they
are
slid
in,
take
your
punc
(or
in
my
case
the
extei
and
hami
the
pins
all
the
way
in.
You
will
have
som
clips

with
the
new
pins,
these
need
to
go
on!
Simply
press
them
on
top
of
the
pins
down
to
the
hinge
metal.
Rein
your
tensi
spring
and
check
the
door
for
loose
by
lifting
it
up
and
down.
You
should
have

no
play
what
so
ever.
Chec
your
door
that
it
close
right.
Spra
the
entire
area
inclu
the
sprin
with
lithi
grea
You
may
hear
som
crea
but
it
goes
away
after
a
bit
once
the
grea
has
work
itself
in.

Enjoy

Here

is

the

com

hinge

with

new

bush

pins,

and

clip..

Boc
this
pos
with



deli



digg



red



furl



tecl

9

com

Su
by
nin
on
Fri
20
05:

Th
a
re
go
ho
to.
I
kno
tha
I
ne

to
rel
my
dri
sid
bu
no
I
knc
wh
it
co
of!

Su
by
chr
on
Sa
200
03:
wh
dic
u
ge
the
do
sp
toc

Re
Do
pi
ar
bu
re
Su
by
240
(nc
ver
on
We
200
16:

did
you
find
out
wh
to
ge
this
toc

Re
Do
pi
ar
bu
re
Su
by
arc
on
Su
200
22:

I
dic
a
se
an
for
wh
the
se
the
toc

for
\$1
plu
shi
Ch
ou
[http](#)
[/to](#)
[/cc](#)

D
S
T
-
G
V
87
\$1
Us
to
rer
an
ins
the
do
hin
sp
fo
on
lat
mc
Ge
Mc
vel
Ma
a
ha
jot
ea
Ca
be
us
wit
1/2
op
en
or
rat
bo
wr
Alv
we
ey
an
fac
pro



Su
by
s10
on
Mc
200
20:
He
tha
for
tak
the
tim
to
shu
ho'
to.

Pr
co
of
you

I
ha
rep
eg
hin
by
usi
J.E
we
I
sin
jb
we

the
ne'
bu:
into
the
hin
Th
jb
tak
up
sp:
be
eg
hin
anu
bu:
Gu
tog
ins
pin
to
ke:
str:
Le
it
dry
of
co:
a
co:
da:
the
pu:
do
ba:
on
Of
co:
we
anu
dri:
is
mu
be
bu:
tak
mu
mc
tim
anu
no:
evi
ha:
a
we
I
ha
do
thi:
on
a
co:

cal
and
it
se
to
wo
gre
bu
so
the
be
I
co
se
if
it
las
or
no

Su
by
mr
on
Tu
20
17:
I
ha
a
ha
tim
ge
the
pin
all
of
the
wa
in,
are
you
sul
it's
alri
to
jus
ha
it
in?
I
do
wa
to
f'
up
the
bu:
by
ha

toc
hai

and
a
wa
to
ev
ma
sul
you
rea
rea
be
cal
tak
the
do
off
sin
the
top
of
the
fer
rea
f'e
up
the
pai
Ha
to
me
and
the
tap
dic
rea
he
Th
tap
acl
lef
res
Da
ma
tap
So
be
and
do
be
stu
like
I
wa

R
D

pi
ar
bu
re

Su
by
aj-i
on
Fri
200
12:

Th
AL
a
"to
you
ne



Gl
I
for
this
for
Th
is
ex
wh
I
ne
to
fix
on
my
S-

Th
I
ho
the
bu:
will
be
en
an
I
wo
ha
to
rep
the
bra



Re: Door pin and bushing repair

Submitted by daniel on Friday, 2008-09-05 00:00

How about a panel for the pin and bushing? I bought one from NA but the SC is for foc for lon tha ne be If I we to ins the da thi

it
wo
stic
our
ab
the
fer

Su
by
ST
on
Sa
200
22:
Jus
dic
a
do
sw
toc

Air
hai
ow
in
ge
do
pin
our

Re
Do
pi
ar
bu
re
Su
by
DM
on
Mc
200
15:
he
wh
up
my
nal
is
de
i
ha
a
96

che
s-1
i
am
ge
a
noi
ou
of
my
dri
do
wh
i
op
an
clo
it.
i
ha
lub
the
do
me
tim
do
tha
me
the
i
ne
a
ne
do
pin
or
so
kin
of
adj

re
full
three

[privacy](#) | [your ca privacy rights](#) | [contact us](#) | [terms](#)
© autoforums.com inc. 2000-2009

Terms of Use